

Customer Information Sheet

IF IN DOUBT - ASK



NOT TO SCALE

THIRD ANGLE PROJECTION






ALL DIMENSIONS IN mm

NOTES:

Current Rating: 1.0AMP
 Contact Resistance: 20mΩ Max
 Withstanding Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

MATERIAL:

Insulator Material: PBT+30% G.F UL94V-0

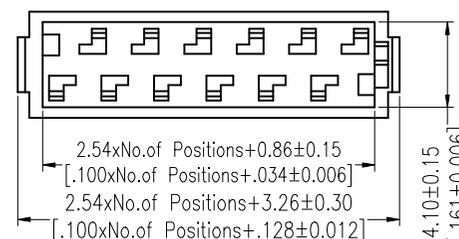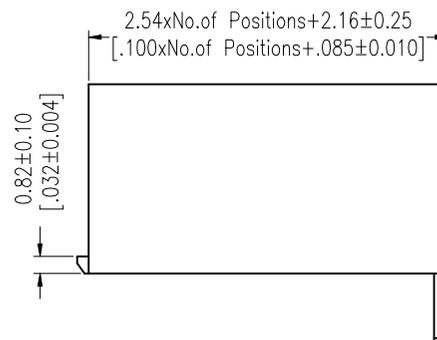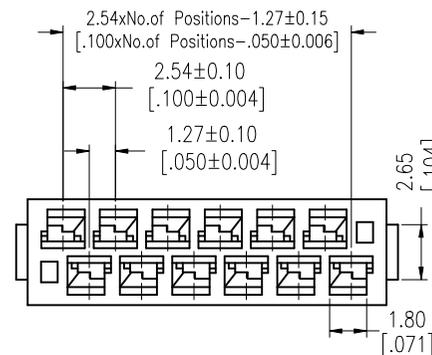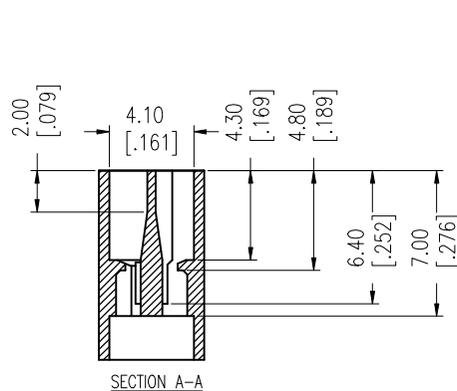

PART NUMBER

M SCM - XX FH N B

SignalCore Micro
1.27mm Pitch

Packing :
B = Bag

No of Pin :
04P 08P
06P 12P

Latch Option :
N=No Latch

AT	01	15May18	--
NAME	ISS.	DATE	CN/CO
APPROVED: WT /ML			
CHECKED:		TA	
DRAWN:		WC	

HARWIN

www.harwin.com

GENERAL TOLERANCE

LENGTH	ANGLE
X. ±NA	±3.0°
.X ±0.40	
.XX ±0.25	
.XXX ±0.15	

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

MATERIAL & FINISH:

SEE ABOVE

TITLE:

1.27mm Pitch Connector Crimp Housing

DRAWING NUMBER:

MSCM-XXFHNB

1 SHT
OF
1