

Customer Information Sheet

IF IN DOUBT - ASK



NOT TO SCALE

THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

NOTES:

1. MATERIAL


HOUSING: HIGH-TEMP PLASTIC, UL 94V-0, COLOUR: NATURAL
ACTUATOR: HIGH-TEMP PLASTIC, UL 94V-0, COLOUR: BLACK
TERMINAL: COPPER ALLOY
PEG: COPPER ALLOY

2. PLATING:

TERMINAL: GOLD OR TIN PLATED ON NICKEL OVERALL
PEG: TIN PLATED ON NICKEL OVERALL

3. RATING:

CURRENT RATING: 0.4A AC/DC
VOLTAGE RATING: 50V AC/DC
TEMPERATURE RANGE: -25°C~+85°C

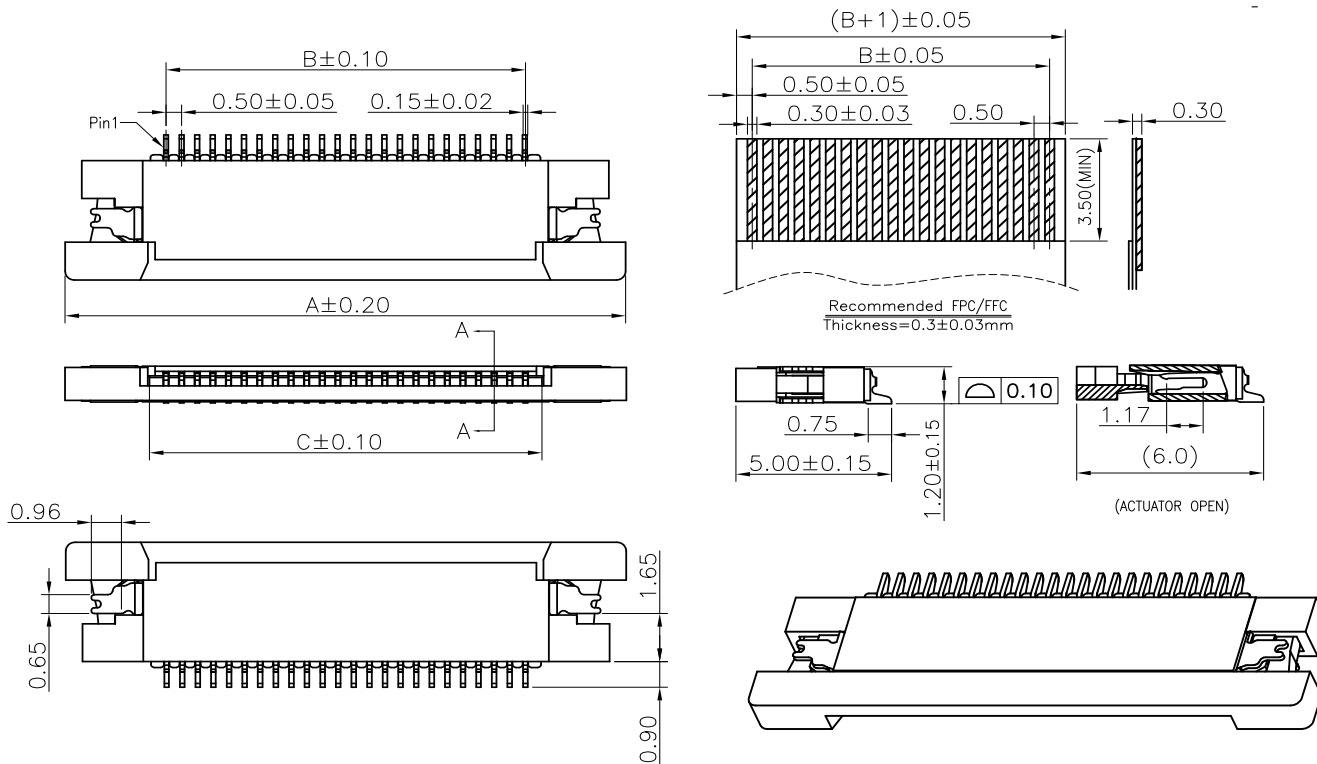

PART NUMBER

MM FPC 050 - 035 - U XX XX X X

Pitch: 0.50mm


Contact Type: Upper

No of Pins

Plating :
GF = Gold Flash
TO = Matte Tin

Packing :
R = Tape&Reel
T = Tube

Housing:
B = Black
N = Natural

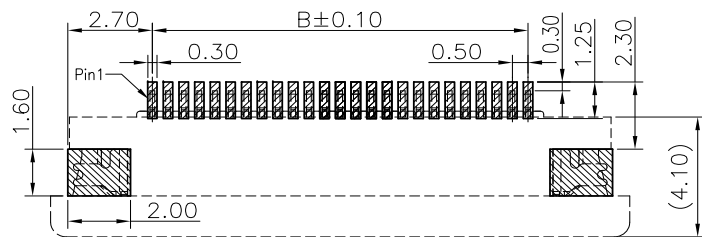

Recommended P.C.B. Layout
Total tolerance: ±0.05mm

Remark: * Pin not available, tooling required.

PIN No.	Dimensions(mm)			PIN No.	Dimensions(mm)			PIN No.	Dimensions(mm)		
	A	B	C		A	B	C		A	B	C
4	7.96	1.50	2.56	23	17.46	11.00	12.06	42*	26.96	20.50	21.56
5	8.46	2.00	3.06	24	17.96	11.50	12.56	43*	27.46	21.00	22.06
6	8.96	2.50	3.56	25*	18.46	12.00	13.06	44*	27.96	21.50	22.56
7	9.46	3.00	4.06	26	18.96	12.50	13.56	45	28.46	22.00	23.06
8	9.96	3.50	4.56	27*	19.46	13.00	14.06	46*	28.96	22.50	23.56
9	10.46	4.00	5.06	28	19.96	13.50	14.56	47*	29.46	23.00	24.06
10	10.96	4.50	5.56	29*	20.46	14.00	15.06	48*	29.96	23.50	24.56
11	11.46	5.00	6.06	30	20.96	14.50	15.56	49*	30.46	24.00	25.06
12	11.96	5.50	6.56	31*	21.46	15.00	16.06	50	30.96	24.50	25.56
13	12.46	6.00	7.06	32	21.96	15.50	16.56	51*	31.46	25.00	26.06
14	12.96	6.50	7.56	33*	22.46	16.00	17.06	52	31.96	25.50	26.56
15	13.46	7.00	8.06	34	22.96	16.50	17.56	53*	32.46	26.00	27.06
16	13.96	7.50	8.56	35*	23.46	17.00	18.06	54*	32.96	26.50	27.56
17	14.46	8.00	9.06	36	23.96	17.50	18.56	55	33.46	27.00	28.06
18	14.96	8.50	9.56	37*	24.46	18.00	19.06	56	33.96	27.50	28.56
19	15.46	9.00	10.06	38*	24.96	18.50	19.56	57*	34.46	28.00	29.06
20	15.96	9.50	10.56	39*	25.46	19.00	20.06	58*	34.96	28.50	29.56
21	16.46	10.00	11.06	40	25.96	19.50	20.56	59*	35.46	29.00	30.06
22	16.96	10.50	11.56	41*	26.46	20.00	21.06	60*	35.96	29.50	30.56

HARWIN

www.harwin.com

TOLERANCES
X. = ± 0.50mm
XX = ± 0.25mm
X.XX = ± 0.15mm
X.XXX = ± 0.08mm
ANGLES = ± 2°
UNLESS STATED

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

MATERIAL & FINISH:

SEE ABOVE

TITLE:

0.5mm Pitch H1.2 FPC R/A SMT
- Upper Contact

DRAWING NUMBER:

MMFPC050-035-UXXXXXX

SHT
1
OF
1