

Customer Information Sheet

IF IN DOUBT - ASK



NOT TO SCALE

THIRD ANGLE PROJECTION


ALL DIMENSIONS IN mm

NOTES:



Current Rating: 1.0AMP
 Contact Resistance: 20mΩ Max
 Withstanding Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

MATERIAL:

Contact Material: Phosphor Bronze
 Contact Plating: Sn Over Ni
 Insulator Material: PA46+30%G.F UL94V-0

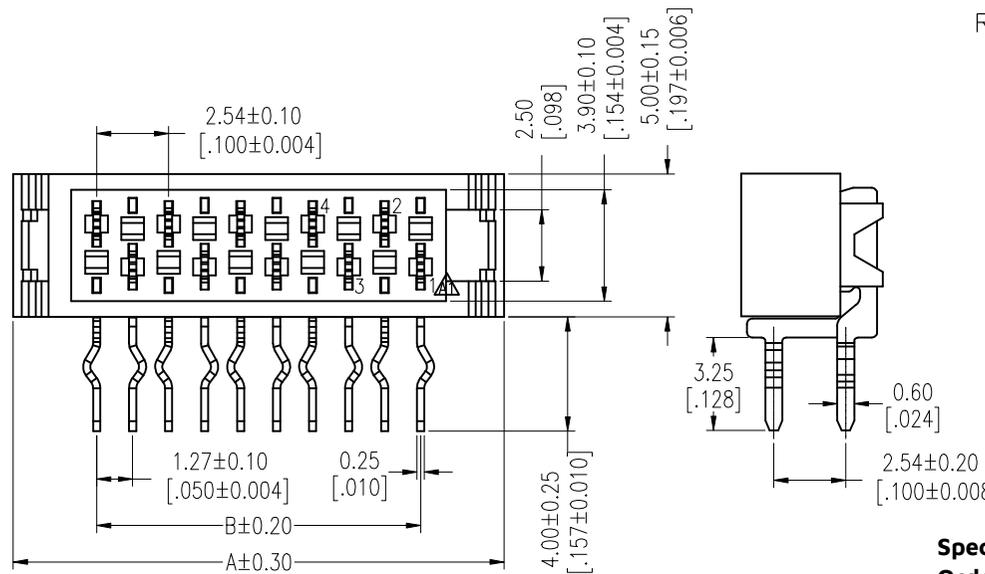


Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)

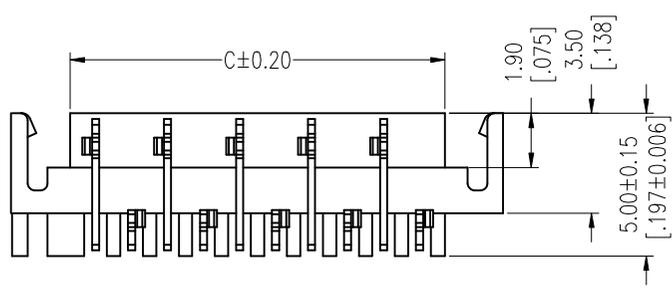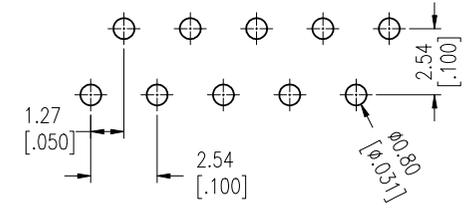

Specification & Ordering Information:

Pin No	Dimension			Q'ty /Tube
	A	B	C	
04	9.70	3.81	5.60	59
06	12.24	6.35	8.14	47
08	14.78	8.89	10.68	39
10	17.32	11.43	13.22	33
12	19.86	13.97	15.76	29
14	22.40	16.51	18.30	25
16	24.94	19.05	20.84	23
18	27.48	21.59	23.38	21
20	30.02	24.13	25.92	19
22	32.56	26.67	28.46	17
24	35.10	29.21	31.00	16
26	37.64	31.75	33.54	15

PART NUMBER
 M SCM - XX FB RA L T1 T

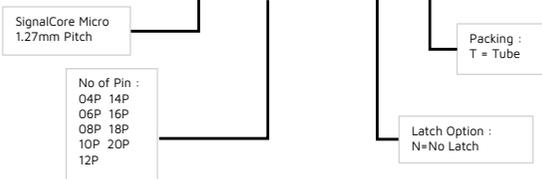

AT	01	04FEB26	--
NAME	ISS.	DATE	CN/CO
APPROVED: WT /ML			
CHECKED: TA			
DRAWN: WC			



www.harwin.com

GENERAL TOLERANCE

LENGTH	ANGLE
X. ±NA	±3.0°
.X ±0.40	
.XX ±0.25	
.XXX ±0.15	

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

MATERIAL & FINISH:

SEE ABOVE

TITLE:

1.27mm PITCH Connector Socket 90°
 DIP With Latch

DRAWING NUMBER:

MSCM-XXFBRAL1T

1 SHT
 OF
 1