

Customer Information Sheet



IF IN DOUBT - ASK



NOT TO SCALE

THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

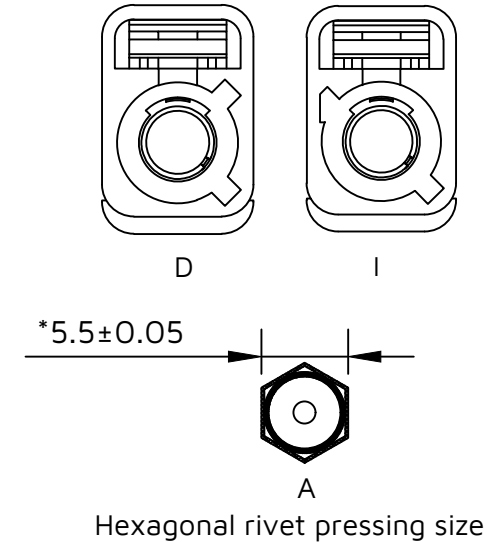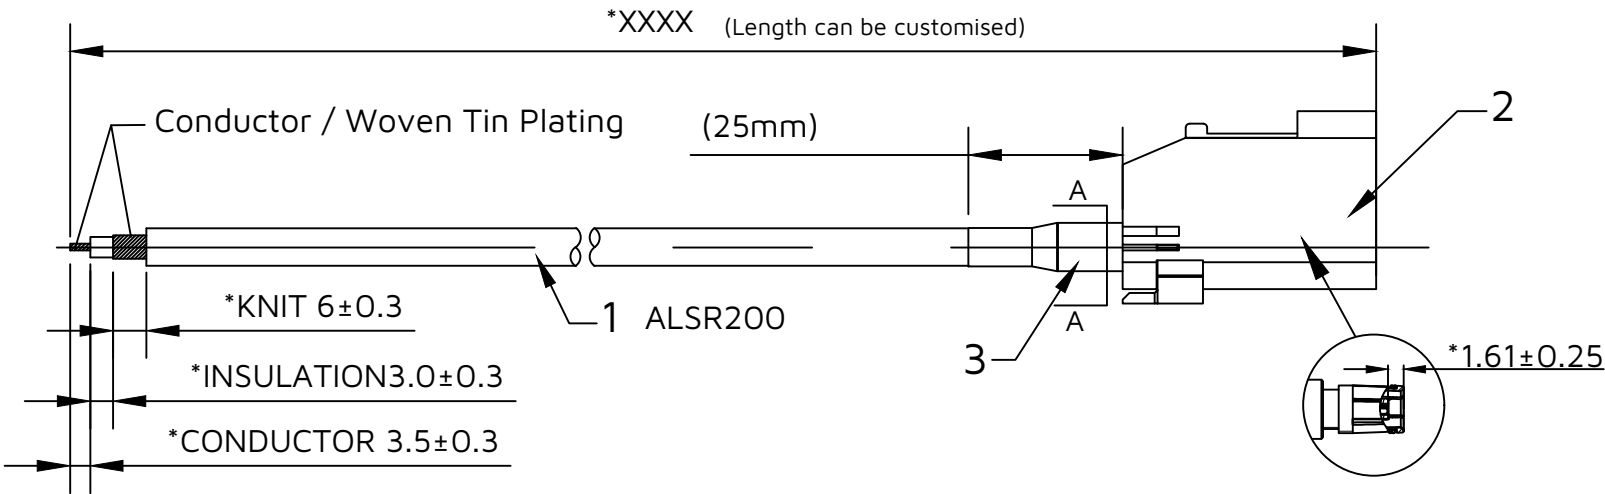

* Cable Length and Tolerance Table	
0-500mm	±5mm
501-1000mm	±10mm
>1000mm	±20mm

Technical Requirements:

- 100% Open Circuit and Short Circuit Test:
Withstand Voltage: AC 500V, Current 0.05mA
Insulation: DC 500V, Insulation Resistance: 500MΩ
- Dimensions marked with * are key inspection dimensions.
- Materials comply with ROHS and Halogen-Free standards (Cl < 900ppm, Br < 900ppm, Cl + Br < 1500ppm).
- The retention force between FAKRA and the wire shall be ≥ 100N.

3	TUPE	1	HET SHRINK TUBE BLACK L=25mm
2	FAKRA	1	FAKRA D FAKRA I
		1	COPPER PIPE
		1	PING
		1	SMB
1	CABLE	1	ALSR200 Black Cable
NO.	NAME	Q'TY	Material

KC	1	08JUL25	--
NAME	ISS.	DATE	CN/CO
APPROVED: WALKER/MEIZY			
CHECKED: THIRI			
DRAWN: KC			

HARWIN

www.harwin.com

TOLERANCES
 X. = ±1mm
 X.X = ±0.50mm
 X.XX = ±0.20mm
 X.XXX = ±0.01mm
 ANGLES = ±5-
 UNLESS STATED

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

MATERIAL & FINISH:

SEE ABOVE

TITLE:
ALSR200 FAKRA

DRAWING NUMBER:
MMCB-130007XXXX-S-001

SHT
1
OF
1