

Customer Information Sheet

IF IN DOUBT - ASK




NOT TO SCALE

THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

Material and coating	
Outer conductor	Gold-plated brass
Inner conductor	Beryllium copper gold plating
Medium body	PTFE
Electrical performance	
Characteristic impedance	50Ω
Usage frequency	10MHz~18GHz
Insulation resistance	≥5000MΩ
Dielectric withstand voltage	1000Vrms
Contact resistance	Central conductor≤4mΩ, Outer conductor≤2.5mΩ
VSWR	≤1.2
Insertion loss	≤0.05~/f(GHz)dB

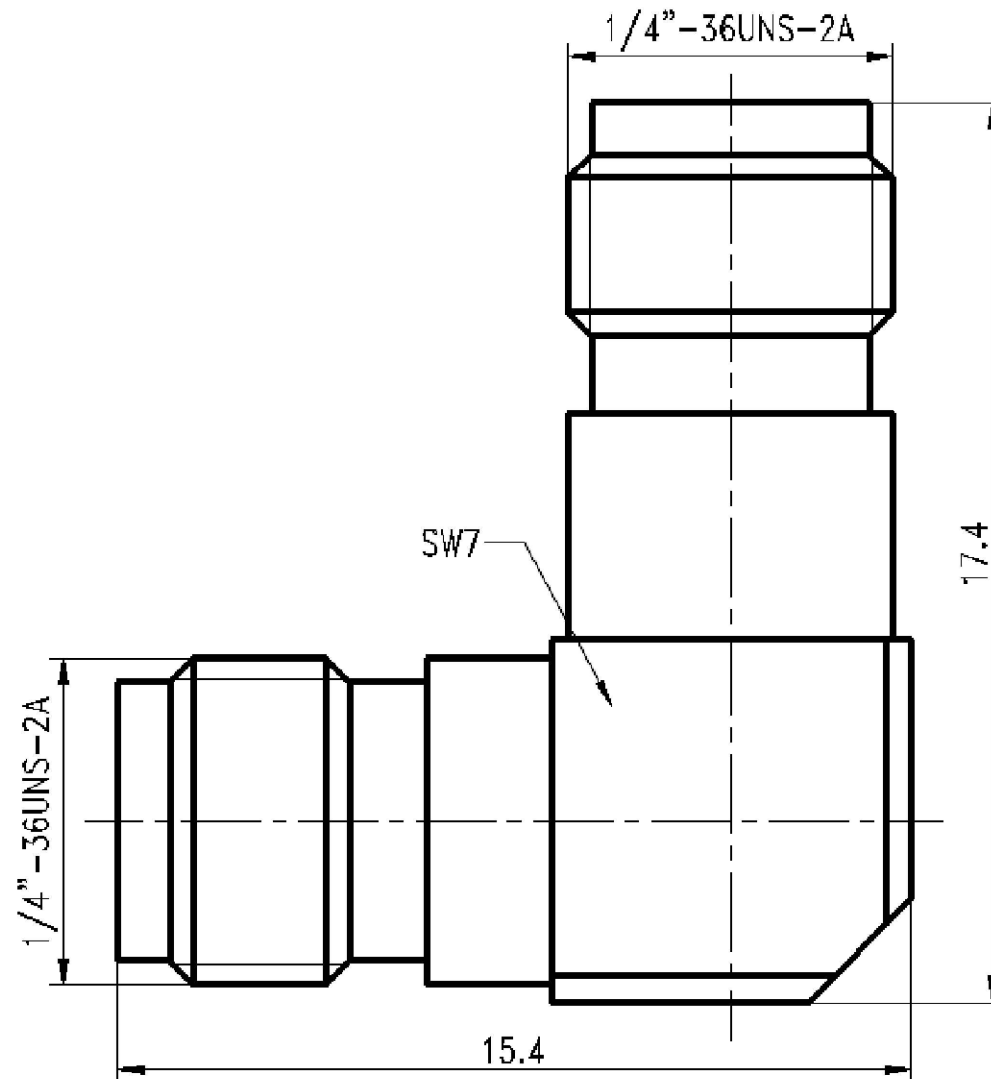

NAME	ISS.	DATE	CN/CO
APPROVED:			
CHECKED:			
DRAWN:			

HARWIN

www.harwin.com

TOLERANCES
X. = ±1mm
X.X = ±0.50mm
X.XX = ±0.10mm
X.XXX = ±0.01mm
ANGLES = ±5°
UNLESS STATED

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

MATERIAL & FINISH:

TITLE:

SMA Type, Jack - Jack, Curved
Adapter, 50 ohm

DRAWING NUMBER:

MMCN-0100BK-RA-001

SHT
1
OF
1