

# Customer Information Sheet

IF IN DOUBT - ASK




NOT TO SCALE

THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

High requirements for terminal riveting:

CH-1	1.34~1.40
CH-2	1.36~1.42
CH-3	1.28~1.34

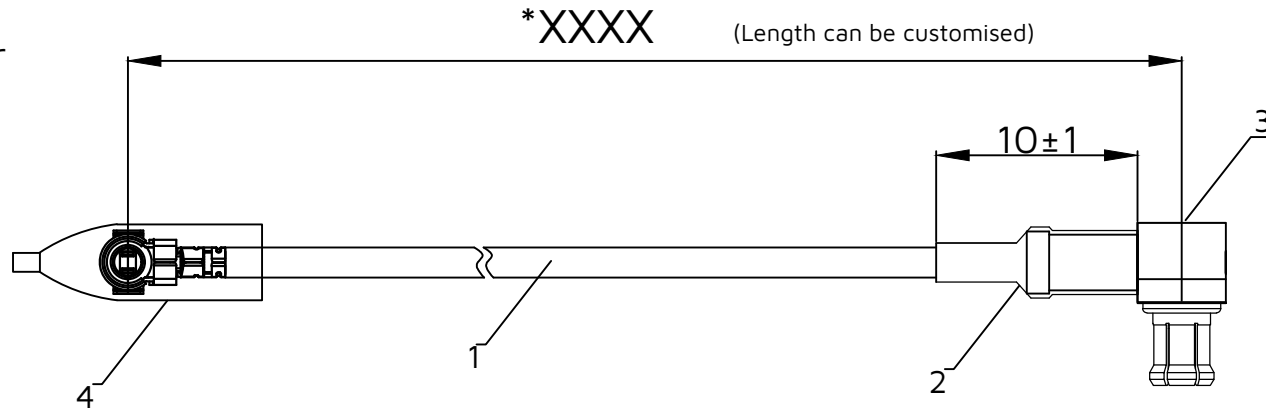

Remarks; The direction of the MHF cup mouth and MCX is shown in the figure.

Technical Requirements:

- 100% open circuit and short circuit testing:  
Withstand voltage: AC 500V  
Insulation: DC 500V , Insulation resistance :500MΩ
- Frequency: DC-6GHz, standing wave ≤1.5, insertion loss ≤-1.4dB.
- The wire holding force is ≥25N.
- The direction of the MHF cup mouth and MCX is shown in the figure.
- Note: There is no gap between the black sleeve and the cable after heat shrinkage.
- Packaging requirements: Every 4 screws should be packed in a small packaging bag and included as an accessory with 1 component put it in a packaging bag.
- The materials use

0-500mm	±5mm
501-1000mm	±10mm
>1000mm	±20mm

4	Ø2.5 Transparent sheath	1
3	MCX Connector	1
2	The black casing of Ø3.0 has no printed words	1
1	Ø1.37 Black Low-Damage Single-Ended I-PEX	1
NO.	NAME	Q'TY

KC	1	03JUL25	--
NAME	ISS.	DATE	CN/CO
APPROVED: WALKER/MEIZY			
CHECKED:		THIRI	
DRAWN:		KC	

# HARWIN

www.harwin.com

TOLERANCES  
 X. = ±1mm  
 X.X = ±0.50mm  
 X.XX = ±0.20mm  
 X.XXX = ±0.01mm  
 ANGLES = ±5-  
 UNLESS STATED

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

MATERIAL & FINISH:

TITLE:

MCX+1.37 Black Cable+IPEX

DRAWING NUMBER:

MMCB-060706XXXX-S-001

SHT  
1  
OF  
1