

Customer Information Sheet


IF IN DOUBT - ASK

©

NOT TO SCALE

THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

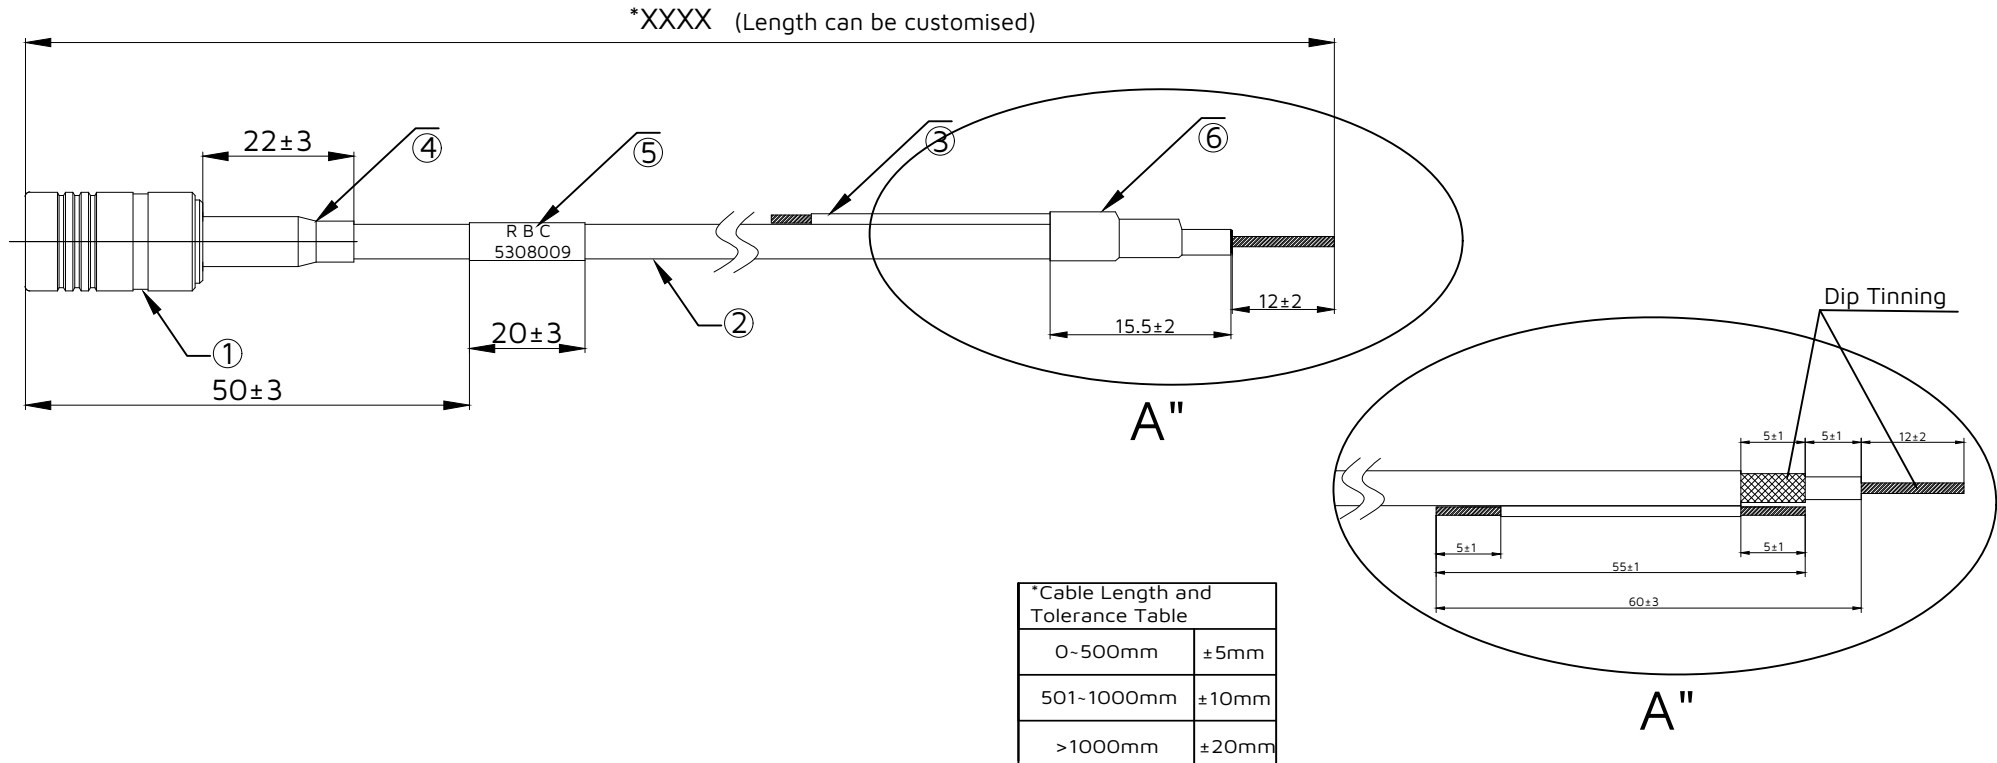

0-500mm	±5mm
501-1000mm	±10mm
>1000mm	±20mm

Technical requirements:

- 1.100% open circuit and short circuit testing:
Withstand voltage: AC 500V; Insulation: DC 500V
Insulation resistance: 500MΩ
2. Net instrument test; DC-6GHz VSWR:1.85
3. The size marked with * is the key inspection size.
4. Materials comply with ROHS standards.
5. The salt spray test must meet the following requirements: 48H .
6. The radio frequency range requirements should meet the specifications.
7. The appearance of the product can not be damaged,
and the appearance of the product has no color difference.

ITEM NO.	DESCRIPTION	plating
1	SMB CONNECTOR	Au
2	RF174Black CABLE	Black
3	24AWG electronic wire	Blue
4	Ø3.2 Black rubber-coated sleeve	Black
5	Ø4.0 white sleeve is printed with black characters	White
6	Ø3.5 Black heat shrink tubing	Black

KC	1	08JUL25	--
NAME	ISS.	DATE	CN/CO
APPROVED: WALKER/MEIZY			
CHECKED: THIRI			
DRAWN: KC			

HARWIN

www.harwin.com

TOLERANCES
 X. = ±1mm
 X.X = ±0.50mm
 X.XX = ±0.20mm
 X.XXX = ±0.01mm
 ANGLES = ±5-
 UNLESS STATED

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

MATERIAL & FINISH:

SEE ABOVE

TITLE:
RF174Black Cable +SMB

DRAWING NUMBER:
MMCB-120001XXXX-S-001

SHT
1
OF
1